# 24-Port Gigabit Ethernet Switch

## 2*1000M SFP ports + 24*10/100/1000M RJ45 ports

S200-26GP-S2-AC

- Non-blocking, low delay design
- Eco-friendly and energy-saving
- Plug and Play




- AI PoE
- 250m extend
- Port Isolation
- Storm Control

## | Product Overview

The S200 series of Ethernet Switches are unmanaged network switches designed to deliver fast, reliable Gigabit connectivity, providing a quick and cost-effective network expansion solution for home offices and small to medium-sized businesses, which adopts low power consumption design, which meets the requirements of green environmental protection and energy saving; all ports support auto-MDI/MDI-X and wire-speed forwarding, ensuring stable and reliable data transmission.

.

## | Key Features

- Supports IEEE 802.3 af/at, PoE management, and PoE Watchdog;
- 4KV port lightning protection;
- ESD: contact 8KV, air 15KV;
- -10~50℃ wide operating temperature range;
- Support MDI/MDIX

## | Hardware Features

| Model | S200-26GP-S2-AC |
|---|---|
| **Interface** | 2*1000M SFP ports + 24*10/100/1000M RJ45 ports |
| **Switching Capacity** | 52Gbps |
| **Packets Forwarding Rate** | 38.6Mpps |
| **MAC** | 8K |
| **Port Buffer** | 4.1M |
| **Transfer Delay** | <10us |
| **Power Supply** | AC 100-240V 50/60Hz |
| | Empty Load Power: <15W |
| **LED Indicators** | PWR,Link/ACT |
| **PoE** | 1-24 ports support PoE |
| | IEEE 802.3 af/at standards |
| | PoE power: 300W/400W optional |
| | PIN Sequence: 1,2+/3,6- |
| **Environment** | Working Temperature: –10℃ ~ 50℃ |
| | Storage Temperature: –40℃ ~ 85℃ |
| | Working Humidity: 10%~95% non-condensing |
| | Storage Humidity: 10%~95% non-condensing |

| Model | S200-26GP-S2-AC |
|---|---|
| DIP Specification | PoE Watchdog<br>250m Extend(1-8)<br>Port Isolation<br>Storm Control |
| Size(W*D*H) | 440*280*44mm |
| Weight | 3.9KG |
| EMC | Power Surge Protection: 6KV/2KV<br>Ethernet Port Surge Protection: 4KV/2KV<br>Anti-static Interference: 8KV/15KV<br>Free Drop: 0.5M |
| Certificate Compliance | CE/FCC/RoHS |
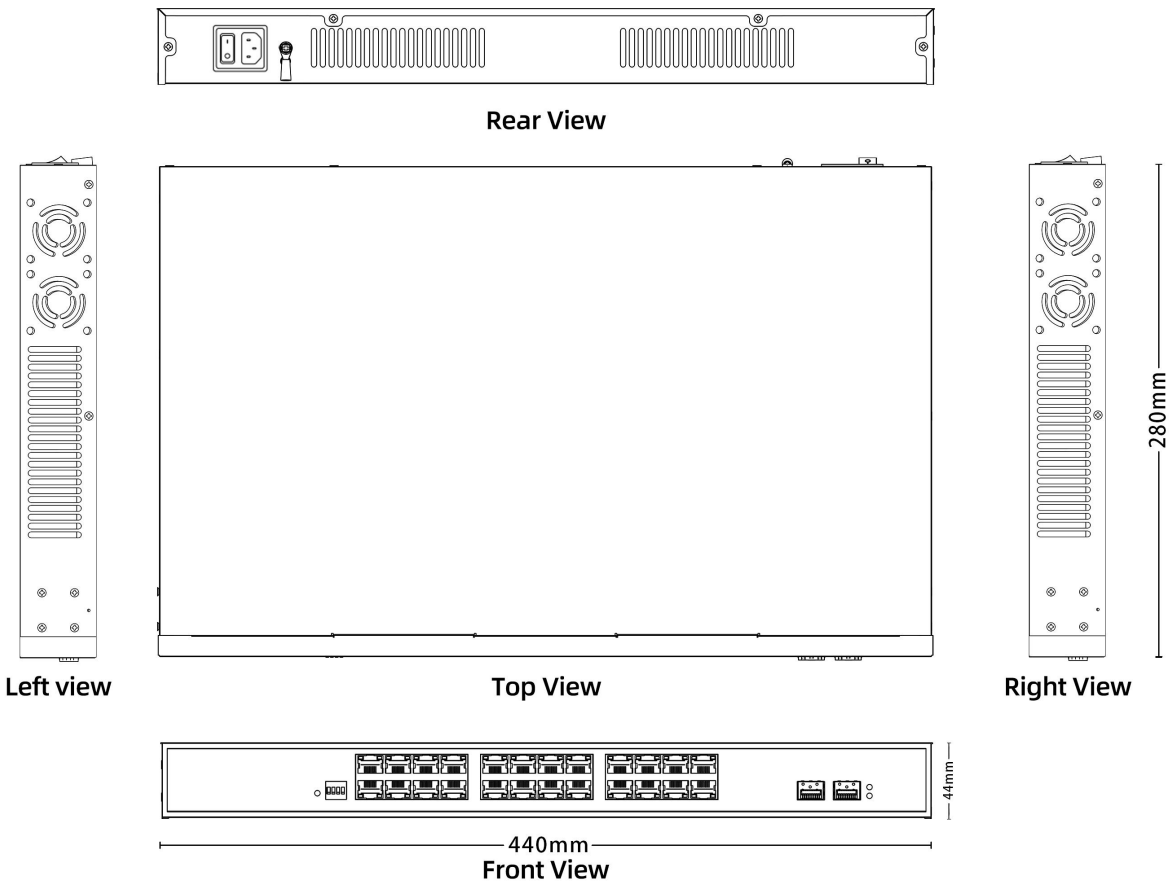
## Product Dimensions